



REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

ML6 Polyurethane  
See chart for durometer options

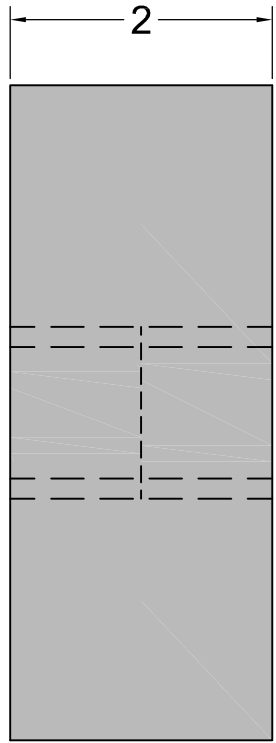

Durometer Options	
Replace <b>XXX</b> in Part Number with 3 letter durometer code from options below.	
<b>40A</b> = 40 SHORE A	<b>80A</b> = 80 SHORE A
<b>55A</b> = 55 SHORE A	<b>90A</b> = 90 SHORE A
<b>70A</b> = 70 SHORE A	

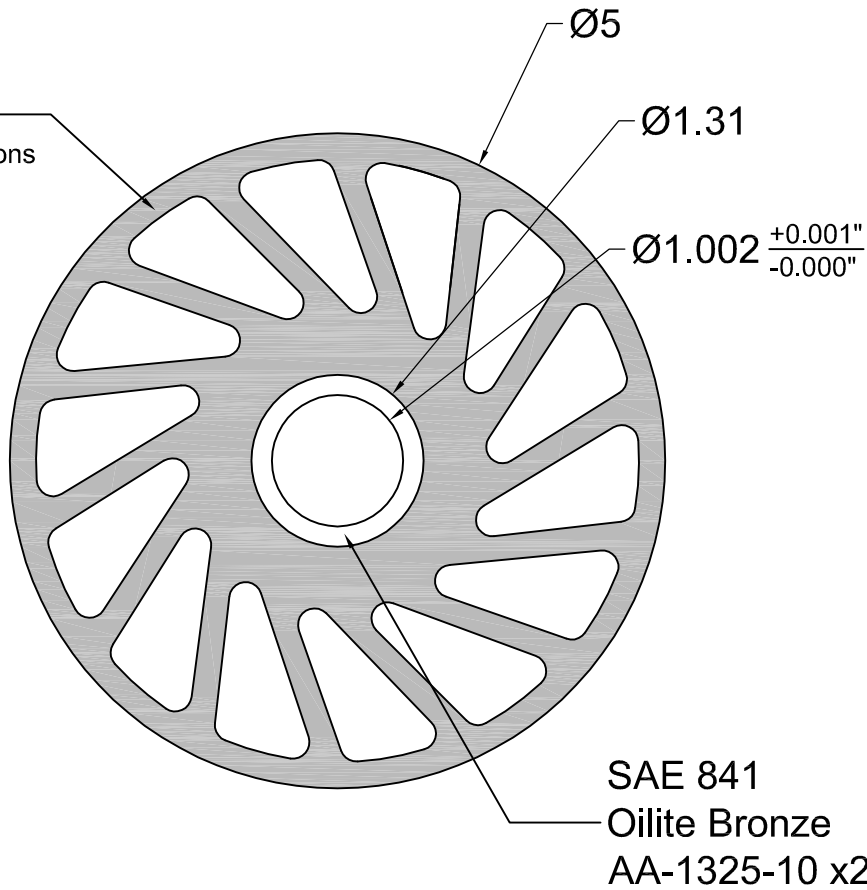


**MERIDIAN  
LABORATORY**

2415 Pleasant View Rd. Middleton, WI 53562  
(608) 836-7571 MeridianLab.com

This drawing is proprietary to Meridian Laboratory Inc. and may not be copied, disclosed, or distributed without explicit written permission. Design subject to change without notice.

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS ARE IN INCHES AND  
TOLERANCES ARE:  
FRACTIONS  $\pm 1/16$     DECIMALS  $\begin{matrix} .X \pm .1 \\ .XX \pm .01 \\ .XXX \pm .005 \end{matrix}$     ANGLES  $\pm 1/2^\circ$



APPROVALS	DATE
DRAWN <b>AG</b>	<b>5/18/23</b>
CHECKED <b>VRN</b>	<b>5/18/23</b>
APPROVED	

TITLE	<b>5.0" x 2.0" ML6 NO-CRUSH WHEEL</b>		
PART NO.	<b>NCWOB-530-XXX</b>		
MATERIAL	SAE 841 OILITE BRONZE & ML6 PU OVERMOLD		
SCALE	<b>3:2</b>	REV.	-
SHEET	<b>1 of 1</b>	ML6 CUST. BLOCK	